




Part Number: RSRK 50-877

7/8" Power Double-Ended Cordset: Male straight to female straight, 5-pin, yellow body, 600 V (UL), 8 A (UL); TPE yellow cable, 16 AWG

Product Description

7/8" Power Double-Ended Cordset: Male straight to female straight, 5-pin, yellow body, 600 V (UL), 8 A (UL); TPE yellow cable, 16 AWG

Technical Drawing

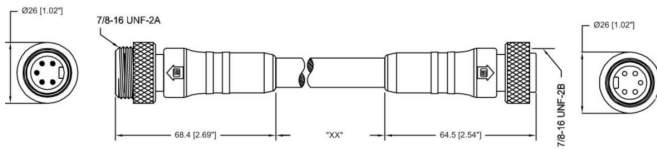

Technical Specifications

Product Description

Product Family:	Power Connector
Brand:	Lumberg Automation
Connector Type:	Cordset, double ended
Shielding:	Unshielded
Rated Voltage (UL):	600 V
Rated Current (UL):	8 A

Technical Data Side 1

Product Sub Family:	7/8" Circular Connectors
Type of Contact / Gender:	male
Connector Design:	straight
Attachment Type:	Coupling nut with external threads
Number of Pins:	5
Ambient Temperature (Operation):	-40°C to +90°C
Protection Degree / IP Rating:	IP 67 / NEMA 6P
Contact Base Material:	CuZn
Contact Plating:	gold over silver plated
Contact Bearer Material:	TPU
Contact Bearer Color:	yellow
Molded Body Material:	TPU
Molded Body Color:	yellow

Cable Data

Cable Number:	877
Conductor Size:	16 AWG
Number of Wires:	5
Cable Jacket Material:	TPE
Cable Jacket Color:	Yellow
Cable Diameter D:	.371" (9.4 mm)
UL Cable Type:	TC-ER

Technical Data Side 2

Product Sub Family, Side 2:	7/8" Circular Connectors
Type of Contact / Gender, Side 2:	female
Connector Design, Side 2:	straight
Attachment Type, Side 2:	Coupling nut with internal threads
Number of Pins, Side 2:	5
Ambient Temperature (Operation), Side 2:	-40°C to +90°C
Protection Degree / IP Rating, Side 2:	* only if mounted and locked in combination with Hirschmann / Lumberg connector.
Contact Base Material, Side 2:	CuZn
Contact Plating, Side 2:	gold over silver plated
Contact Bearer Material, Side 2:	TPU
Contact Bearer Color, Side 2:	yellow
Molded Body Material, Side 2:	TPU
Molded Body Color, Side 2:	yellow

Approvals

UL:	UL 2238 Recognized
-----	--------------------

Safety & Environmental Compliance

RoHS Compliant:	yes
-----------------	-----

Notes

Protection Degree / IP Rating Note:	* only if mounted and locked in combination with Hirschmann / Lumberg connector.
-------------------------------------	--

Variants

Item #	Item Description	Cable Length
500003375	RSRK 50-877/0.5M	0.5 m
500003252	RSRK 50-877/1M	1 m
500003200	RSRK 50-877/2M	2 m
500003196	RSRK 50-877/3M	3 m
500003376	RSRK 50-877/4M	4 m
500003199	RSRK 50-877/5M	5 m
500003377	RSRK 50-877/6M	6 m
500003378	RSRK 50-877/7M	7 m
500003329	RSRK 50-877/8M	8 m
500004220	RSRK 50-877/9M	9 m
500003197	RSRK 50-877/10M	10 m
500003379	RSRK 50-877/12M	12 m
500003328	RSRK 50-877/13M	13 m
500003304	RSRK 50-877/15M	15 m
500003198	RSRK 50-877/20M	20 m
500004063	RSRK 50-877/22M	22 m
500003303	RSRK 50-877/25M	25 m
500003302	RSRK 50-877/30M	30 m
500003444	RSRK 50-877/35M	35 m
500003380	RSRK 50-877/40M	40 m
500004070	RSRK 50-877/45M	45 m
500003381	RSRK 50-877/50M	50 m
500004069	RSRK 50-877/55M	55 m
500003382	RSRK 50-877/60M	60 m
500003383	RSRK 50-877/70M	70 m
500003384	RSRK 50-877/80M	80 m

at the date of its publication. This information is designed only as a general guide for the safe handling, storage, and any other operation of the product itself or the one that it becomes a part of. The Product Disclosure is not to be considered a warranty or quality specification. Regulatory information is for guidance purposes only. Product users are responsible for determining the applicability of legislation and regulations based on their individual usage of the product.