

**PT170400**

**LASER SENSORS • DIFFUSE REFLECTION SENSORS WITH BACKGROUND SUPPRESSION**

Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.



**MECHANICAL DATA**

Ambient temperature (MAX)	50 °C
Ambient temperature (MIN)	-10 °C
Cable length	2 m
Degree of protection (IP)	IP67
Housing design	Cuboid
Housing material	Zinc die-cast
Material of cable sheath	PVC
Material of optical surface	Glass
Number of wires	4
Reflector included in the scope of delivery	No
Sensor height	50 mm
Sensor length	50 mm
Sensor width	15.4 mm
Wire cross section	0.25 mm <sup>2</sup>

**ELECTRICAL DATA**

Adjustment range (MAX)	300 mm
Adjustment range (MIN)	25 mm
Analogue output 0 mA ... 20 mA	No
Analogue output 0 V ... 10 V	No
Analogue output -10 V ... +10 V	No
Analogue output 4 mA ... 20 mA	No
Decay time	0.6 ms
Interference suppression	Yes
Laser power	1 mW
Max. output current	200 mA
Max. switching distance	300 mm


**ELECTRICAL DATA**

No-load current	35 mA
Number of switching outputs	2
Operating voltage (MAX)	30 V
Operating voltage (MIN)	10 V
Rated switching distance	300 mm
Relative repeat accuracy	0.1 mm
Response time	0.6 ms
Reverse polarity protection	Yes
Scanning function	Light-/dark-on mode
Sensing range (MAX)	300 mm
Sensing range (MIN)	25 mm
Setting procedure	Manual adjustment
Short-circuit-proof	Yes
Switching frequency	800 Hz
Type of electrical connection	Cable
Type of switching function	Normally closed contact/normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC
With LED display	Yes
With LED display (operation)	Yes
With LED display (signal)	Yes
With other analog output	No

**OPTICAL DATA**

Background suppression	Yes
Laser class	2
Laser focus distance	80 mm
Light beam form	Point
Light source	Laser diode, red light
Light spot	0.01 mm <sup>2</sup>
Resolution	0.1 mm
Triangulation	Background suppression
Wavelength of the sensor	650 nm


## CONNECTION

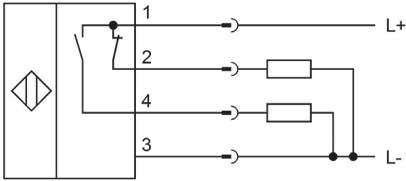

**Colors:** 1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)

**Functions:** 1 = L+, 2 = pnp/nc, 3 = L-, 4 = PNP NO

## DIMENSIONAL DRAWING

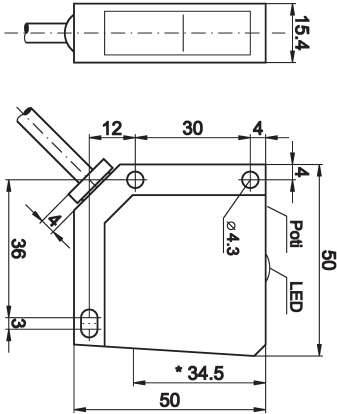

## INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

## DISPOSAL



## SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.