

## IN800140

### INDUCTIVE SENSORS • ENLARGED AMBIENT TEMPERATURE

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.



#### MECHANICAL DATA

Active area material of sensor	PTFE
Ambient temperature (MAX)	160 °C
Degree of protection (IP)	IP50
Housing design	Cylinder, screw-thread
Housing material	Stainless steel 1.4305
Increased ambient temperatures > 80°C	Yes
Mechanical mounting condition for sensor	Non-flush
Pressure-proof	No
Sensor length	81 mm
Thread length	40 mm
Thread pitch	1.5 mm
Thread size, metric	80

#### ELECTRICAL DATA

Cascadable	No
Hysteresis	15 %
Max. output current	150 mA
No-load current	15 mA
Norm measuring plate	80x80x1
Reverse polarity protection	Yes
Short-circuit-proof	Yes
Suitable for safety functions	No
Supply voltage (MAX)	35 V
Supply voltage (MIN)	10 V
Switching distance	50 mm
Switching frequency	100 Hz
Type of electrical connection	Lemosa-connector
Type of switching function	Normally open contact
Type of switching output	PNP
Voltage drop	2 V
Voltage type	DC


**ELECTRICAL DATA**

With monitoring function of downstream devices No

**OTHER DATA**


Areas inquiry	Yes
---------------	-----

**CONNECTION**

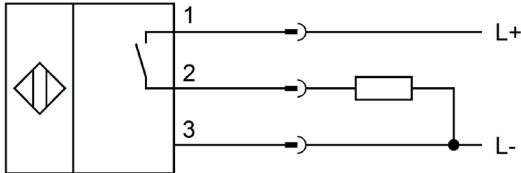

**Colors:** 1 = BN (brown), 2 = BU (blue), 3 = BK (black)  
**Functions:** 1 = L+, 2 = PNP NO, 3 = L-

**DIMENSIONAL DRAWING**

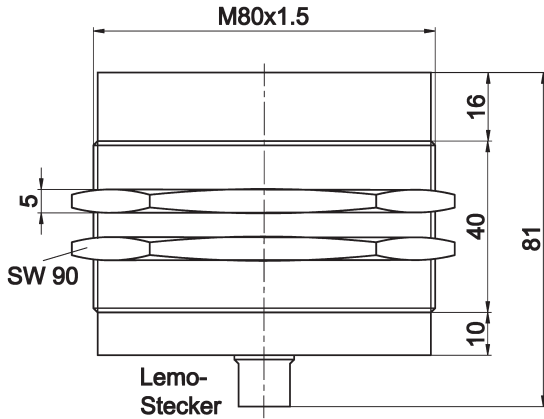

**INSTALLATION**



Mounting / Installation may only be carried out by a qualified electrician!

**DISPOSAL**



**SAFETY WARNINGS**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.