

## PT493075

### LASER SENSORS • DISTANCE MEASUREMENT

Optical sensors function contactlessly. They detect objects independent of their characteristics (e.g., shape, color, surface structure, material). The basic operating principle is based on the transmission and reception of light. There are three different versions: 1. The through-beam sensor consists of two separate devices, a transmitter and a receiver that are aligned with one another. If the light beam between the two devices is interrupted, the switching output integrated in the receiver changes its status. 2. With the retro-reflective sensor, the transmitter and receiver are located in one device. The emitted light beam is reflected back to the receiver by a reflector that is to be mounted opposite the device. As soon as the light beam is interrupted, the switching output integrated in the device changes its status. 3. With the diffuse reflection sensor, the transmitter and receiver are in one device. The emitted light beam is reflected by the object that is to be detected. As soon as the receiver detects the reflected light, the switching output integrated in the device changes its status.



#### MECHANICAL DATA

Ambient temperature (MAX)	50 °C
Ambient temperature (MIN)	0 °C
Degree of protection (IP)	IP67
Housing design	Cuboid
Housing material	Aluminium
Material of optical surface	Glass
Sensor height	48.2 mm
Sensor length	40 mm
Sensor width	13.4 mm

#### ELECTRICAL DATA

Absolute linearity deviation	1.2 mm
Decay time	0.9 ms
Measuring method for optical distance measurement	Triangulation
Measuring range length (MAX)	350 mm
Measuring range length (MIN)	50 mm
No-load current	80 mA
Number of pins	4
Response time	0.9 ms
Response/decay time	0.9 ms
Reverse polarity protection	Yes
Scanning principle	Push button
Setting procedure	Teach-In
Short-circuit-proof	Yes
Supply voltage (MAX)	28 V
Supply voltage (MIN)	12 V
Type of analog output	0 V ... 10 V

## ELECTRICAL DATA

Type of electrical connection	Connector M8
Voltage type	DC
With LED display	Yes


## OPTICAL DATA

Laser protection class	Class 2
Light beam form	Line
Light source	Laser diode, red light
Light spot range	8 mm <sup>2</sup>
Light spot, laser focus	8 mm <sup>2</sup>
Resolution	400 µm
Teach-in limits distance	5 mm
Wavelength of the sensor	675 nm

## OTHER DATA

Relative linearity deviation	1.2 %
------------------------------	-------


## CONNECTION

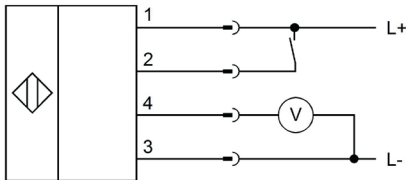

**Colors:** 1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)

**Functions:** 1 = L+, 2 = teach-in, 3 = L-, 4 = 0-10V

## DIMENSIONAL DRAWING

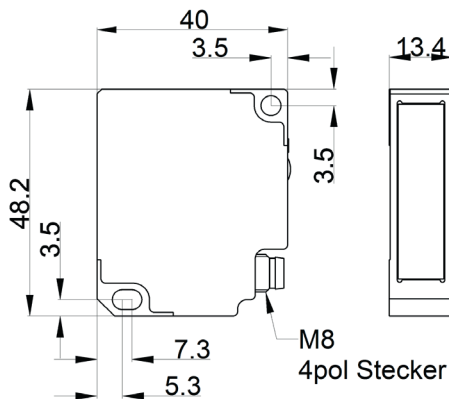

## INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

## DISPOSAL



## SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.