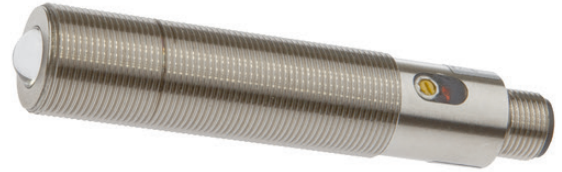


PE18A036**LASER SENSORS • THROUGH-BEAM SENSORS RECEIVERS****ELECTRICAL DATA**

Max. output current	100 mA
Max. output current at safe output	100 mA
Measuring range	2.5 m
No-load current	30 mA
No-load current, receiver	30 mA
Number of semiconductor outputs with signaling function	1
Operating voltage (MAX)	32 V
Operating voltage (MIN)	12 V
Rated control supply voltage U_s at DC (MAX)	32 V
Rated control supply voltage U_s at DC (MIN)	12 V
Type of switching output	PNP
Voltage type	DC

DIMENSIONAL DRAWING**INSTALLATION**

Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL**SAFETY WARNINGS**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.