


IB08C321

INDUCTIVE SENSORS • NORM SWITCHING DISTANCE

Inductive proximity switches are contact-free sensors. They detect all conductive metals, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material and its dimensions. The vibration-resistant sensors can be approached laterally or frontally. Inductive proximity switches are used for presence detection (e.g. goods carriers), positioning (e.g. dampers), counting (e.g. nuts /bolts), speed detection (e.g. for cog wheels), on conveyor systems (e.g. hose feedings) or distance measurements (e.g. press-in checking) of metallic objects.

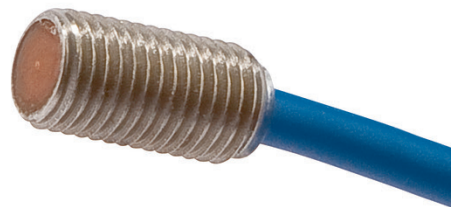

MECHANICAL DATA

Active area material of sensor	PVC
Ambient temperature	-25 °C ... 70 °C
Cable length	10 m
Degree of protection (IP)	IP67
Housing design	Cylinder, screw-thread
Housing material	Stainless steel 1.4305
Material of cable sheath	PVC
Mechanical mounting condition for sensor	Flush
Number of wires	2
Pressure-proof	No
Sensor length	16 mm
Thread pitch	1 mm
Thread size, metric	8

ELECTRICAL DATA

Cascadable	No
Connection to amplifier	Yes
IO-Link compatible	No
Max. output current	2.1 mA
Suitable for safety functions	No
Supply voltage	5 V ... 15 V
Switching distance	1.5 mm
Type of electrical connection	Cable
Type of switching function	Amplifier
Type of switching output	NAMUR
Voltage type	DC
With monitoring function of downstream devices	No

DIMENSIONAL DRAWING**INSTALLATION**

Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL**SAFETY WARNINGS**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!