

KN326053

CAPACITIVE SENSORS • ENLARGED AMBIENT TEMPERATURE

Capacitive proximity switches are contact-free sensors. They detect metallic and non-metallic objects, regardless of whether they move or not. The achievable sensing range of the devices depends on the object material, its dimensions and the response sensitivity, which is set via a potentiometer. The vibration-resistant sensors can be approached laterally or frontally. Capacitive proximity switches are used for presence detection (e.g. sealing detection), positioning (e.g. PET bottles), counting (e.g. plastic caps), level detection (e.g. lubricant) or distance measurements (e.g. thickness measurement) of solid and liquid materials.


MECHANICAL DATA

Active area material of sensor	PTFE
Ambient temperature	-70 °C ... 250 °C
Ambient temperatures < -25°C	Yes
Cable length	15 m
Degree of protection (IP)	IP67
Housing design	Cylinder, screw-thread
Housing material	Stainless steel V2A
Increased ambient temperatures > 80°C	Yes
Material of cable sheath	FEP
Mechanical mounting condition for sensor	Non-flush
Pressure-proof	No
Sensor length	70 mm
Thread pitch	1.5 mm
Thread size, metric	32

ELECTRICAL DATA

Cascadable	No
Suitable for safety functions	No
Switching distance	120 mm
Type of electrical connection	Cable with connector
With monitoring function of downstream devices	No

CONNECTION

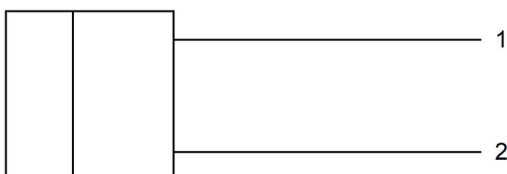

DIMENSIONAL DRAWING

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!