


VK10RF21

CONNECTION TECHNOLOGY • CABLE SOCKETS /CONNECTORS TWO-SIDED PRE-ASSEMBLED

ipf cable sockets are used primarily for establishing the electrical connection of sensors. Their features are characterized by rugged design, the highest protection classes (IP67 | IP68 | IP69K) and, if desired, with 360° shielding. With the features: bus-ready, suitable for use with drag chains and robots, resistance to oil and chemicals, resistance to welding sparks, their resistance to cleaning agents or high-pressure and steam-jet cleaning, the expanded temperature range of up to +230°C, the rapid interconnection technology and special data transmission properties, the cable sockets meet all requirements in automation technology.

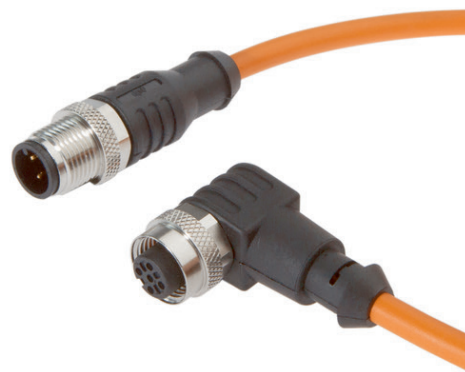

MECHANICAL DATA

| | |
|--|----------------------|
| Ambient temperature (MAX) | 90 °C |
| Ambient temperature (MIN) | -40 °C |
| Cable length | 1 m |
| Cable sheath color | Orange |
| Contact body material | CuZn |
| Contact coating material | Gold |
| Degree of protection (IP) | IP69K |
| Material of cable sheath | PUR (Polyurethane) |
| Number of wires | 4 |
| Perm. ambient temperature of cable, fixed cable (MAX) | 90 °C |
| Perm. ambient temperature of cable, fixed cable (MIN) | -40 °C |
| Perm. ambient temperature of cable, flexible cable (MAX) | 90 °C |
| Perm. ambient temperature of cable, flexible cable (MIN) | -30 °C |
| Positioning of cable feed, field side | Angled |
| Positioning of cable feed, housing side | Straight |
| Seawater-resistant | Yes |
| Suitable for trailing chain | Yes |
| Wire cross section | 0.34 mm ² |

ELECTRICAL DATA

| | |
|---|-----------------|
| Nominal supply voltage | 300 V |
| Number of pins | 4 |
| Rated voltage | 250 V |
| Type of cable | Multi-core |
| Type of electrical connection, field side | M12 |
| Type of electrical connection, housing side | M12 |
| Type of plug-in contact, field side | Female (socket) |
| Type of plug-in contact, housing side | Male (plug) |
| With LED display | No |

OTHER DATA

| | |
|---|---------------------------------|
| Acid and alkali-resistant | Yes |
| Flame resistant | In accordance with EN 60332-2-2 |
| Free of LABS | Yes |
| Halogen-free | Yes |
| Hydrolysis-proof | Yes |
| IR-networked | No |
| Oil and cooling lubricants | Yes |
| Ozone and UV-resistant | Yes |
| Recyclable | Yes |
| Robotics | Yes |
| RoHs-compliant | Yes |
| Silicone-free | Yes |
| Suitable for trailing chain and torsion resistant | Yes |
| Welding area | Yes |

DIMENSIONAL DRAWING

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.