

## OV584080

### HIGH-PERFORMANCE THROUGH-BEAM SENSORS • AMPLIFIERS



#### MECHANICAL DATA

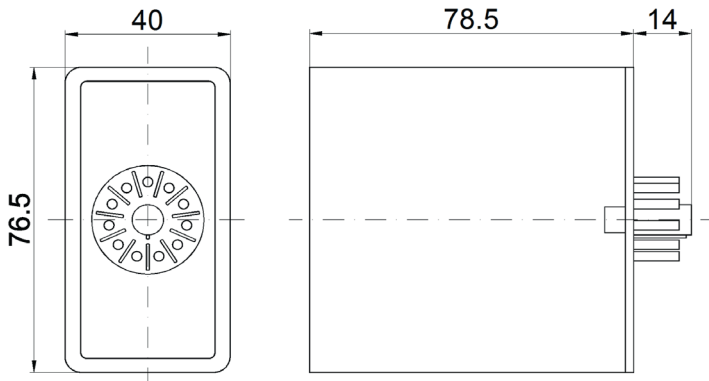
Degree of protection (IP)	IP40
Depth	78.5 mm
Height	76.5 mm
Housing design	Cuboid
Housing material	Plastic
Width	40 mm

#### ELECTRICAL DATA

Galvanic isolation between input and output	No
Galvanic isolation between supply voltage and all other current circuits	No
Inherently safe according to EN 60947-5-6 NAMUR	No
Number of pins	11
Output circuit, relay change-over contact	1
Power consumption	5 W
Rated supply voltage at AC	230 V ... 230 V
Suitable for safety functions	No
Switching capacity	4.2 VA
Switching frequency	18 Hz
Switching voltage	230 V
With LED display	Yes

#### OTHER DATA

Operating temperature	-25 °C ... 50 °C
-----------------------	------------------

**DIMENSIONAL DRAWING****INSTALLATION**

Mounting / Installation may only be carried out by a qualified electrician!

**DISPOSAL****SAFETY WARNINGS**

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!