


## VK805F44

### CONNECTION TECHNOLOGY • CABLE SOCKETS /CONNECTORS TWO-SIDED PRE-ASSEMBLED

ipf cable sockets are used primarily for establishing the electrical connection of sensors. Their features are characterized by rugged design, the highest protection classes (IP67 | IP68 | IP69K) and, if desired, with 360° shielding. With the features: bus-ready, suitable for use with drag chains and robots, resistance to oil and chemicals, resistance to welding sparks, their resistance to cleaning agents or high-pressure and steam-jet cleaning, the expanded temperature range of up to +230°C, the rapid interconnection technology and special data transmission properties, the cable sockets meet all requirements in automation technology.

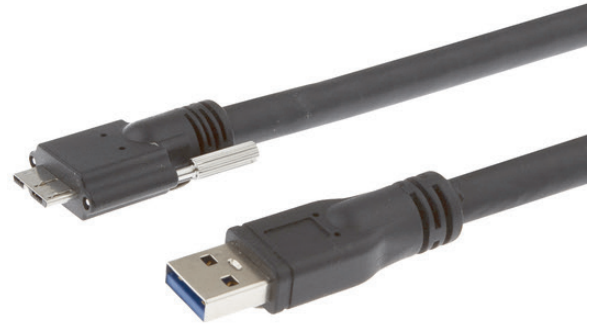


#### MECHANICAL DATA

Approx. outer diameter	7 mm
Color of outer sheath	Black
Core identification	Colour
Core insulation	Polyolefin
Material of outer sheath	PVC
Number of cores	9
Perm. ambient temperature of cable, fixed cable (MAX)	-10 °C
Perm. ambient temperature of cable, fixed cable (MIN)	80 °C

#### OTHER DATA

AWG cross section	24
Category	Other
Flame retardant	In accordance with EN 60332-1-2

#### CONNECTION



#### DIMENSIONAL DRAWING

#### INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

#### DISPOSAL



#### SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.