


VKAE0325

CONNECTION TECHNOLOGY • CABLE SOCKETS /CONNECTORS ONE-SIDED PRE-ASSEMBLED

ipf cable sockets are used primarily for establishing the electrical connection of sensors. Their features are characterized by rugged design, the highest protection classes (IP67 | IP68 | IP69K) and, if desired, with 360° shielding. With the features: bus-ready, suitable for use with drag chains and robots, resistance to oil and chemicals, resistance to welding sparks, their resistance to cleaning agents or high-pressure and steam-jet cleaning, the expanded temperature range of up to +230°C, the rapid interconnection technology and special data transmission properties, the cable sockets meet all requirements in automation technology.

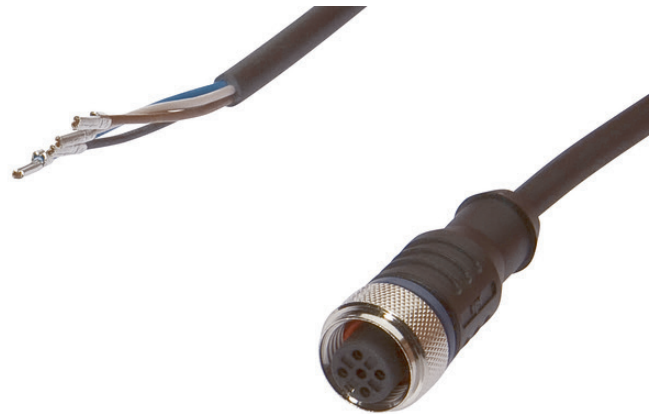

MECHANICAL DATA

| | |
|---|--------------------|
| Cable length | 15 m |
| Material of cable sheath | PUR (Polyurethane) |
| Positioning of cable feed, housing side | Straight |
| Suitable for trailing chain | Yes |
| Wire assembly | 42 x 0.1mm |


ELECTRICAL DATA

| | |
|------------------|--------|
| Line diameter | 4.7 mm |
| Number of pins | 4 |
| With LED display | No |

OTHER DATA

| | |
|---|---------------------------------|
| Flame resistant | In accordance with EN 60332-2-2 |
| Free of LABS | Yes |
| Halogen-free | Yes |
| Hydrolysis-proof | Yes |
| IR-networked | No |
| Oil and cooling lubricants | Yes |
| Ozone and UV-resistant | Yes |
| RoHs-compliant | Yes |
| Silicone-free | Yes |
| Suitable for trailing chain and torsion resistant | Yes |
| Welding area | Yes |


CONNECTION



Colors: 1 = BN (brown), 2 = WH (white), 3 = BU (blue), 4 = BK (black)

Functions:

DIMENSIONAL DRAWING

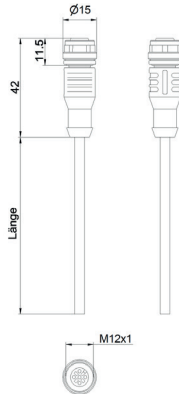

INSTALLATION



Mounting / Installation may only be carried out by a qualified electrician!

DISPOSAL



SAFETY WARNINGS

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information!

Never use these devices in applications where the safety of a person depends on their functionality.