

## UT139570

### ULTRASONIC SENSORS • DIFFUSE REFLECTION SENSORS

sensor ultrasonic, diffuse-reflection sensor, 84x12x12mm, Sn: 20-200, 18-30V DC, 1x PNP/NPN Programmable/configurable, IO-Link, Connector M8 4pin, IP67, Aluminum Anodised, Teach-In, With LED display, ultrasonic cone Lateral



#### MECHANICAL FEATURES

Ambient temperature	-25 °C ... 70 °C
Degree of protection (IP)	IP67
Design	Rod
Diameter detection	+
Furcate	-
Housing coating	Anodized
Housing material	Aluminum
Housing material, detail	Aluminum
Mounting distance	60 mm
Sensor height	84 mm
Sensor length	12 mm
Sensor width	12 mm

#### ELECTRICAL FEATURES

Absolute repeat accuracy	0.5 mm
Adjustable distance	20 mm ... 200 mm
Adjustable measuring range	+
Carrier frequency	400 kHz
Filling level measurement	-
IO-Link compatible	+
No-load current	40 mA
Norm measuring plate	20x20
Number of pins	4
Number of switching outputs	1
Operating voltage	18 V ... 30 V
Protection class	III
Rated switching current	150 mA
Readiness delay	300 ms
Response/decay time	10 ms
Reverse polarity protection	+
Sensing range	20 mm ... 200 mm
Setting procedure	Teach-In
Setting via teach-in	+

**ELECTRICAL FEATURES**

Short-circuit protection	+
Sound cone with small angle of beam spread	+
Sound outlet	Lateral
Switching frequency	20 Hz
Switching output with window function	-
Synchronization input	-
Synchronization possible	-
Temperature drift	0.2 %
Type of electrical connection	Connector M8
Type of switching function	Programmable/configurable
Type of switching output	PNP/NPN
Voltage drop	2 V
Voltage type	DC
With LED display	+

**OPTICAL FEATURES**

Resolution	1 mm
High resolution	-

**OTHER FEATURES**

Dead zone	20 mm
Level detection	+
Loop control	-
Object detection on conveyor systems	+
With protective coating	-

**Other**


Packaging dimensions	150mm x 13.0mm x 160mm
Shipping weight	0.04kg
Tariff code	85365019

**Classification**

ipf product group	250
eClass 8.0	27272803
eClass 9.0	27272803
eClass 9.1	27272803
ETIM-5.0	EC001849
ETIM-6.0	EC001849
ETIM-7.0	EC001849

**Connection**

## Dimensional drawing

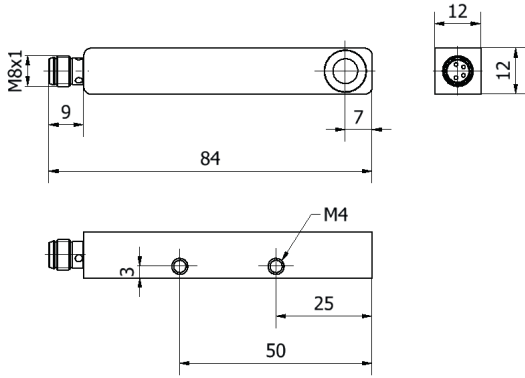

## Installation



Mounting / installation may only be carried out by a qualified electrician!

## Disposal



## Software

Any software, drivers or IODD files that may be required to operate your device can be downloaded free of charge from our homepage: [www.ipf-electronic.com](http://www.ipf-electronic.com)

## Safety warnings

Before initial operation, please make sure to follow all safety instructions that may be provided in the product information. Never use these devices in applications where the safety of a person depends on their functionality.

LED lighting systems can generate intensive UV radiation, which can damage your eyes in case of improper use. The manufacturer cannot be held responsible for damages that result from improper use or connection.